



**Tiger New**  
**N-type BIFACIAL MODULE**  
**WITH DUAL GLASS**  
**575-600 Watt**



**Jinko Solar**  
*Building Your Trust in Solar*

**SOLAR INVERTER MODEL & SPECIFICATION**

**FEATURES**



**N-type Technology**

N-type modules with Tunnel Oxide Passivating Contacts (TOPcon) technology offer lower LID/LeTID degradation and better low light performance.



**HOT 3.0 Technology**

N-type modules with JinkoSolar's HOT 3.0 technology offer better reliability and efficiency.



**Dual-Sided Power Generation**

Dual-sided power generation gain increases with backside exposure to light, significantly reducing LCOE.



**Mechanical Load Enhanced**

Certified to withstand:  
5400 Pa front side max static test load  
2400 Pa rear side max static test load




**SMBB Technology**

Better light trapping and current collection to improve module power output and reliability.



**Anti-PID Guarantee**

Minimizes the chance of degradation caused by PID phenomena through optimization of cell production technology and material control.

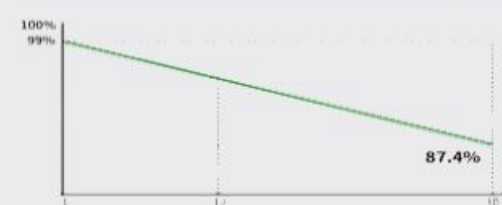

**12 Year** Product Warranty  
**30 Year** Linear Power Warranty  
**1%** 1 Year Degradation  
**0.40%** Annual Degradation Over 30 Years

- IEC61215:2021 / IEC61730:2023
- IEC61701 / IEC62716 / IEC60068 / IEC62804
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational health and safety management systems



JKM575-600N-72HL4-BDV-F9-EN

**72HL4-BDV 575-600 Watt**

**Mechanical Characteristics**

Cell Type	N- type Mono-crystalline
No. of cells	144 (72×2)
Dimensions	2278×1134×30 mm
Weight	31.0 kg
Front Glass	2.0 mm, Anti-reflection Coating
Back Glass	2.0 mm, Heat Strengthened Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Protection Class	Class II
IEC Fire Type	Class C
Connector Type	JK03M/MC4/Others
Output Cables	4.0 mm <sup>2</sup> (+): 400 mm , (-): 200 mm or Customized Length

**Packaging Configuration**

Pallet Dimentions	2338×1140×1251 mm
Packing Detail (Two pallets = One stack)	36 pcs/pallets, 72 pcs/stack, 720 pcs/ 40'HQ Container

**Specifications (STC)**

Maximum Power - Pmax [Wp]	575	580	585	590	595	600
Maximum Power Voltage - Vmp [V]	43.73	43.88	44.02	44.17	44.31	44.45
Maximum Power Current - Imp [A]	13.15	13.22	13.29	13.36	13.43	13.50
Open-circuit Voltage - Voc [V]	52.30	52.50	52.70	52.90	53.10	53.30
Short-circuit Current - Isc [A]	13.89	13.95	14.01	14.07	14.13	14.19
Module Efficiency STC [%]	22.26	22.45	22.65	22.84	23.03	23.23
Power Tolerance	0 ~ + 3 %					
Temperature Coefficients of Pmax	-0.29 %/°C					
Temperature Coefficients of Voc	-0.25 %/°C					
Temperature Coefficients of Isc	0.045 %/°C					

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, AM=1.5

**Specifications (BNPI)**


Maximum Power - Pmax [Wp]	633	638	644	649	655	660
Maximum Power Voltage - Vmp [V]	43.84	44.00	44.17	44.33	44.50	44.66
Maximum Power Current - Imp [A]	14.44	14.50	14.58	14.64	14.72	14.78
Open-circuit Voltage - Voc [V]	52.33	52.53	52.73	52.93	53.13	53.33
Short-circuit Current - Isc [A]	15.19	15.25	15.31	15.37	15.43	15.49

BNPI: Irradiance: front 1000W/m<sup>2</sup>, rear 135W/m<sup>2</sup>, Cell Temperature 25°C, AM=1.5

**Application Conditions**

Operating Temperature	-40 °C ~ +70 °C
Maximum System Voltage	1500 VDC (IEC)
Maximum Series Fuse Rating	30 A
Bifaciality Coefficient	φVoc: 98±5 %, φIsc: 80±5 %, φPmax: 80±5 %

**Engineering Drawings**

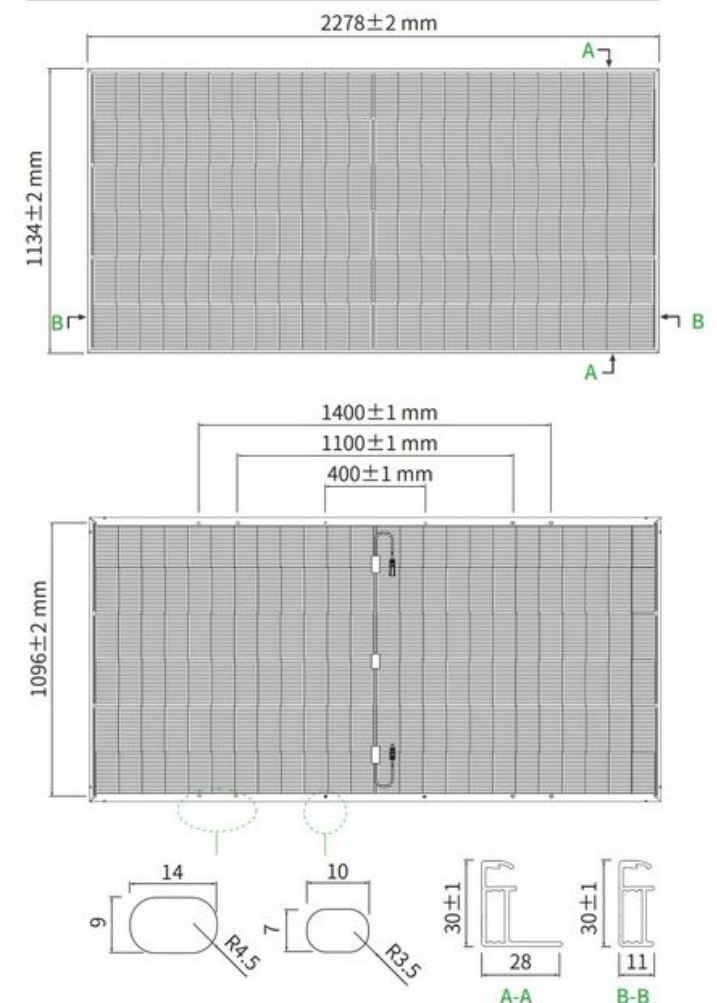

Note: For specific dimensions and tolerance ranges, please refer to the corresponding detailed module drawings.

**Electrical Performance**

